SAMSUNG ELECTRONICS

Product Information

Customer :   Date: Mar. 4, 2008

SAMSUNG TFT-LCD

MODEL : LTA520HB04

The Information Described in this Specification is Preliminary and can be changed without prior notice

NOTE :

APPROVAED BY	DATE	PREPARED BY	DATE
Kyunghoon Ko	Mar.4,.2008	**Pong Ok Park**	Mar.4,.2008

LCD Business

Samsung Electronics Co . , LTD.

MODEL	LTA520HB04	Doc. No	06-002-G-080304	Page	1 / 28

Contents

MODEL	LTA520HB04	Doc. No	06-002-G-080304	Page	2 / 28

* Revision History

Date	Rev. No	Page	Summary
Aug 09, 2007	000	all	First issued
Jan 16 2008	001	7	Color Chromaticity is updated
		19	Clock Min Value is changed 135Mhz →130Mhz
Mar. 4 2008	002	10	16.7 billion colors (Miss typed) → 1.06 billion colors
		14	LVDS input pin map (8bit → 10bit) : Pin # 22/23, # 37/38
		17	JEIDA & Normal → JEIDA only

MODEL	LTA520HB04	Doc. No	06-002-G-080304	Page	3 / 28

General Description

Description

LTA520HB04 is a color active matrix liquid crystal display (LCD) that uses amorphous silicon TFT(Thin Film Transistor) as switching components. This model is composed of a TFT LCD panel, a driver circuit and a back light unit. The resolution of a 52.0" is 1920 x 1080 and this model can display up to 1.06 billion colors with wide viewing angle of 89° or higher in all directions. This panel is intended to support applications to provide a excellent performance for Flat Panel Display such as Home-alone Multimedia TFT-LCD TV and High Definition TV.

Features

- RoHS compliance (Pb-free)
- High contrast & aperture ratio
- SPVA (Super Patterned Vertical Align) mode
- Wide viewing angle (±178°)
- High speed response
- FHD resolution (16:9)
- Low Power consumption
- Direct Type 24 CCFLs (Cold Cathode Fluorescent Lamp)
- DE(Data Enable) mode
- LVDS (Low Voltage Differential Signaling) interface (2pixel/clock)

General Information

Items	Specification	Unit	Note
Module Size	1226.0(H_{TYP}) x 719.2(V_{TYP})	mm	±1.0mm
	60.0(D_{MAX})		
Weight	19,000(Max.)	g	
Pixel Pitch	0.6(H) x 0.6 (V)	mm	
Active Display Area	1152.0(H) x 648.0(V)	mm	
Surface Treatment	Haze 14% , AG(3H)	-	Anti_Glare
Display Colors	10 bit – 1.06 B	Colors	
Number of Pixels	1920 x 1080	Pixel	
Pixel Arrangement	RGB vertical stripe	-	
Display Mode	Normally Black	-	
Luminance of White	500 (Typ.)	cd/m²	

MODEL	LTA520HB04	Doc. No	06-002-G-080304	Page	4 / 28

1. Absolute Maximum Ratings

If the condition exceeds maximum ratings, it can cause malfunction or unrecoverable damage to the device.

Item		Symbol	Min.	Max.	Unit	Note
Power Supply Voltage		V_{DD}	V_{DD} -1.2	*13.2*	V	(1)
Storage temperature		T_{STG}	-20	60	℃	(2)
Glass surface temperature (Operation)	Center	T_{OPR}	0	50	℃	(2),(5)
	T. Uniformity	$\triangle T$	-	10	℃	
Shock (non - operating)		S_{nop}	-	30	G	(3)
Vibration (non - operating)		V_{nop}	-	1.5	G	(4)

Note (1) Ta= 25 ± 2 °C
  (2) Temperature and relative humidity range are shown in the figure below.
     a. 90 % RH Max. (Ta ≤ 39 °C)
     b. Relative Humidity is 90% or less. (Ta > 39 °C)
     c. No condensation
  (3) 11ms, sine wave, one time for ±X, ±Y, ±Z axis
  (4) 10-300 Hz, Sweep rate 10min, 30min for X,Y,Z axis

Relative Humidity(%RH)
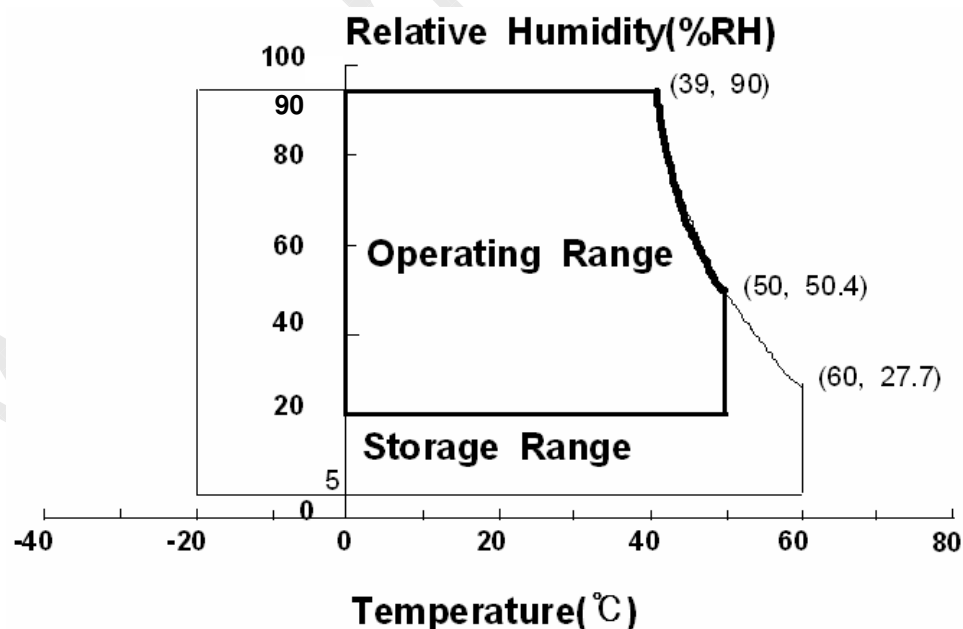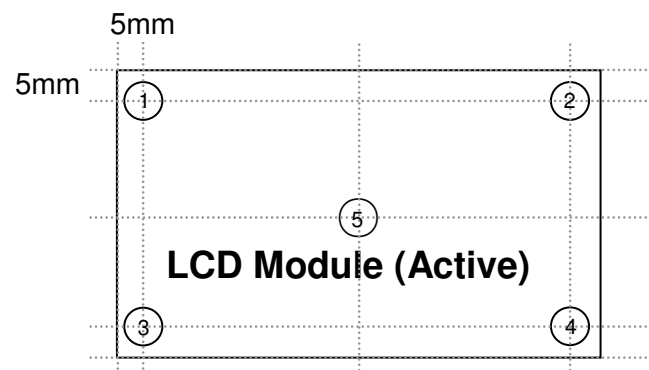
(39, 90)

Operating Range

(50, 50.4)

(60, 27.7)

Storage Range

Temperature(℃)

Fig. Temperature and Relative humidity range

MODEL	LTA520HB04	Doc. No	06-002-G-080304	Page	5 / 28

(5) Definition of test point

$\triangle$T should be less than *10* ℃ ($\triangle$T = | T_{OPR} – T_{MAX}|)

T_{OPR} : Temperature of the center of the glass surface (Test point 5)

T1~ T4 : Temperature of each edge of the glass surface

T_{MAX} : The highest temperature of the glass surface

| MODEL | LTA520HB04 | Doc. No | 06-002-G-080304 | Page | 6 / 28 |

2. Optical Characteristics

The optical characteristics should be measured in a dark room or equivalent.
Measuring equipment : TOPCON RD-80S, TOPCON SR-3 ,ELDIM EZ-Contrast

(Ta = 25 $\pm$ 2°C, VDD=12.0V, fv= 60Hz, f_{DCLK}=148.5 MHz, IL = 6.5 mArms (Hot))

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Contrast Ratio (Center of screen)		C/R		2300	3000	-		(1) SR-3
Response Time	Rising	Tr		-	14	24	msec	(3) RD-80S
	Falling	Tf		-	6	8		
	G to G	Tg		-	8	10		
Luminance of White (Center of screen)		Y_L	Normal θL,R=0 θU,D=0 Viewing Angle	400	500	-	cd/m²	(4) SR-3
Color Chromaticity (CIE 1931)	Red	Rx		TYP. -0.03	0.638	TYP. +0.03		(5),(6) SR-3
		Ry			0.336			
	Green	Gx			0.284			
		Gy			0.607			
	Blue	Bx			0.145			
		By			0.060			
	White	Wx			0.280			
		Wy			0.290			
Color Gamut		-		-	72	-	%	(5) SR-3
Color Temperature		-		-	10000	-	K	
Viewing Angle	Hor.	θ_L	C/R$\geq$10	75	89	-	Degree	(6) EZ-Contrast
		θ_R		75	89	-		
	Ver.	θ_U		75	89	-		
		θ_D		75	89	-		
Brightness Uniformity (9 Points)		B_{uni}		-	-	25	%	(2) SR-3

- Test Equipment Setup

The measurement should be executed in a stable, windless and dark room between 40min and 60min after lighting the back light at the given temperature for stabilization of the back light. This should be measured in the center of screen.

Lamp current : 6.5mA(HOT)
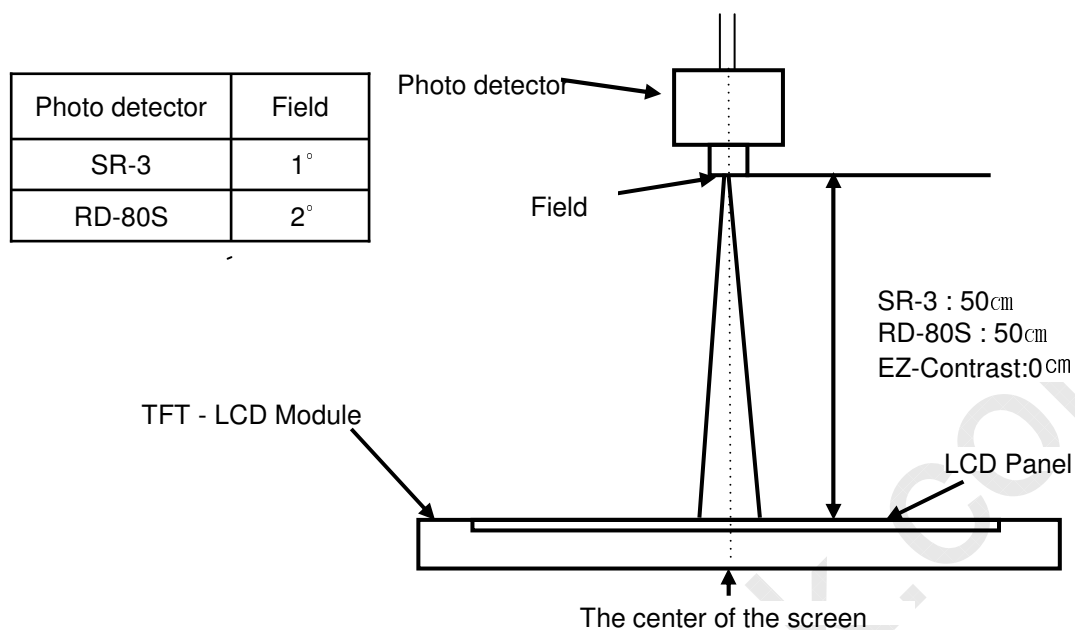Environment condition : Ta = 25 $\pm$ 2 °C
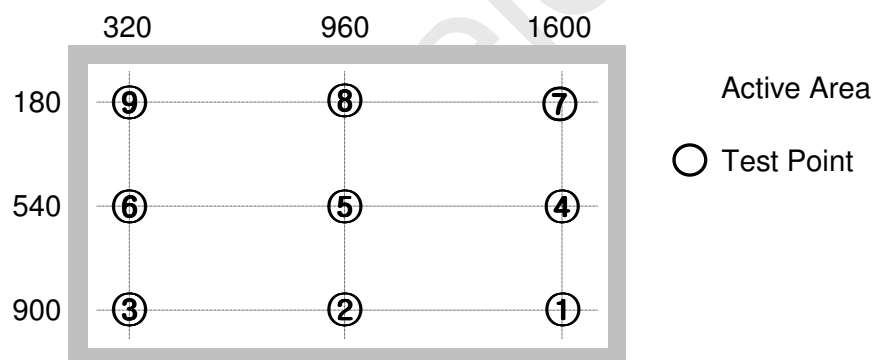
MODEL	LTA520HB04	Doc. No	06-002-G-080304	Page	7 / 28

Photo detector	Field
SR-3	1°
RD-80S	2°

Photo detector

Field

SR-3 : 50㎝
RD-80S : 50㎝
EZ-Contrast:0㎝

TFT - LCD Module

LCD Panel

The center of the screen

- Definition of test point

Active Area

◯ Test Point

Note (1) Definition of Contrast Ratio (C/R)
: Ratio of gray max (Gmax) & gray min (Gmin) at the center point ⑤ of the panel

$$C/R = \frac{G\max}{G\min}$$

Gmax : Luminance with all pixels white
Gmin : Luminance with all pixels black

MODEL	LTA520HB04	Doc. No	06-002-G-080304	Page	8 / 28

Note (2) Definition of 9 points brightness uniformity (Test pattern : Full White)

$$Buni = 100 * \frac{(B\max - B\min)}{B\max}$$

Bmax : Maximum brightness
Bmin : Minimum brightness

Note (3) Definition of Response time : Sum of Tr, Tf

Display data   Black (data off)   White (data on)   Black (data off)

Optical Instruments
Response
100%
90%

T_R T_F

10%
0%
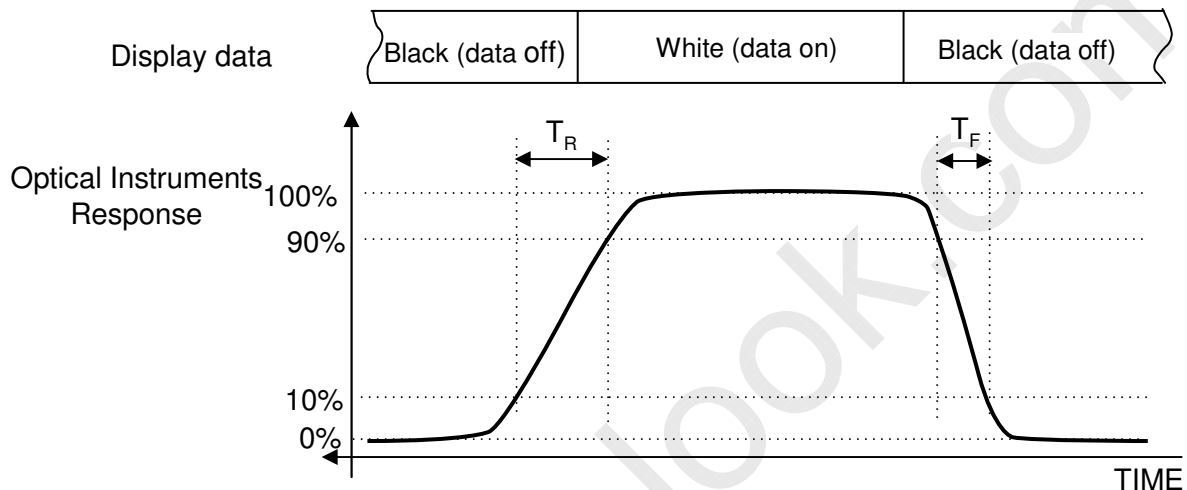
TIME

※ G-to-G : Average response time between Gray to Gray (Scale)

Note (4) Definition of Luminance of White : Luminance of white at center point ⑤

Note (5) Definition of Color Chromaticity (CIE 1931)
Color coordinate of Red, Green, Blue & White at center point ⑤

Note (6) Definition of Viewing Angle
: Viewing angle range (C/R ≥10)

Θ_U

Θ_R

Θ_L

Θ_D

| MODEL | LTA520HB04 | Doc. No | 06-002-G-080304 | Page | 9 / 28 |
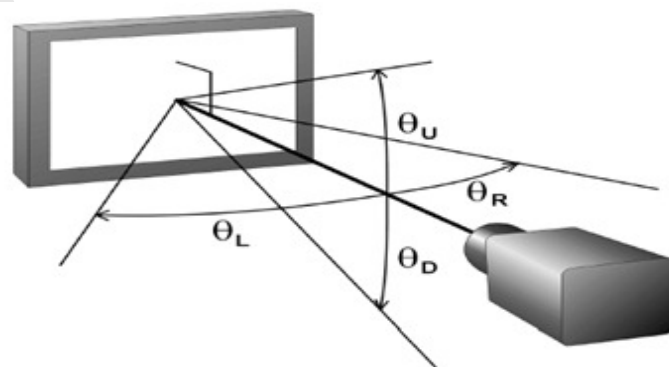
3. Electrical Characteristics

3.1 TFT LCD Module

The connector for display data & timing signal should be connected.

$Ta = 25°C \pm 2 °C$

Item		Symbol	Min.	Typ.	Max.	Unit	Note
Voltage of Power Supply		V_{DD}	10.8	12.0	13.2	V	(1)
Current of Power Supply	(a) Black	I_{DD}	-	730	800	mA	(2),(3)
	(b) White		-	1200	1430	mA	
	(c) Checker		-	1380	1520	mA	
Vsync Frequency		f_V	48	60	62	Hz	
Hsync Frequency		f_H	50	67.5	75	kHz	
Main Frequency		Fdclk	130	148.5	155	MHz	
Rush Current		I_{RUSH}	-	-	5	A	(4)

Note (1) The ripple voltage should be controlled under 10% of V_{DD}.

　　　(2) f_V=60Hz, f_{DCLK} = 148.5MHz, V_{DD} = 12.0V, DC Current.

　　　(3) Power dissipation check pattern (LCD Module only)

　　a) Black Pattern　　b) White　　　　c) Checker

　　(4) Measurement Conditions

T_{RUSH}=470μs
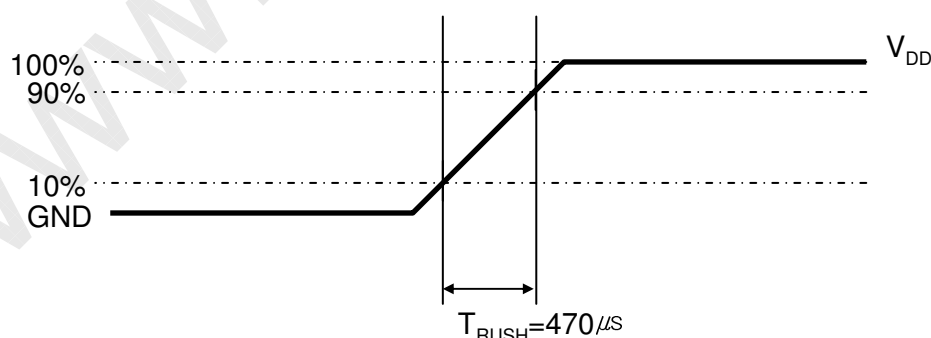
Rush Current I_{RUSH} can be measured when T_{RUSH}. is 470μs.

MODEL	LTA520HB04	Doc. No	06-002-G-080304	Page	10 / 28

3.2 Back Light Unit

The back light unit contains 24 direct-lighting type CCFLs (Cold Cathode Fluorescent Lamp). The characteristics of lamps are shown in the following tables.

Ta=25 $\pm$ 2°C
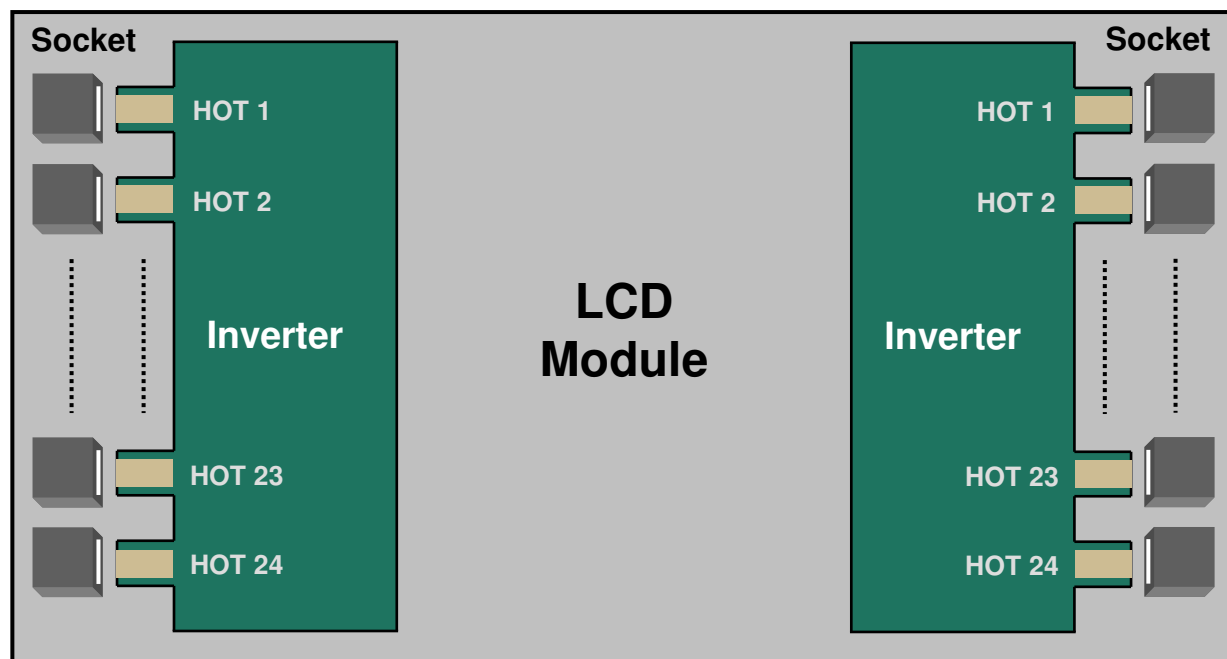
Item	Symbol	Min.	Typ.	Max.	Unit	Note
Operating Life Time	Hr	50,000	-	-	Hour	(1)

Note (1) It is defined as the time to take until the brightness reduces to 50% of its original value.

[Operating condition : Ta = 25$\pm$2℃, I_L = 6.5 mArms, For single lamp only.]

MODEL	LTA520HB04	Doc. No	06-002-G-080304	Page	11 / 28

3.3 Inverter Input Condition & Specification

Items	Symbol	Conditions	Specifications			Unit	Note
			Min.	Typ.	Max.		
Input Voltage	Vin	-	22	24	26	V	Ta=25±2 °C
Input Current	I_{RUSH}	Vin=24.0V Vdim=3.3V	-	-	13.4	A	Initial Turn-on
Lamp Current	I_O	Vin = 24V Vdim = 3.3V	5.8	6.5	7.2	mArms	After 1 hour Warm-up (1)
Frequency	F_{LAMP}	Vin = 24V	40	42	44	kHz	-
Backlight On/Off	ON	Vin = 24V	2.4	-	5.5	V	-
	OFF	Vin = 24V	0	-	0.8		
Dimming Control	V_{DIM}	Max Lum	3.3	-	-	V	-
		Min. Lum	-	-	0		

Note (1) Power Consumption is measured at 500[cd/m2] of luminance condition which is
the typical luminance value. Lamp Current is measured at the point before Lamp.

MODEL	LTA520HB04	Doc. No	06-002-G-080304	Page	12 / 28

4. Block Diagram

| MODEL | LTA520HB04 | Doc. No | 06-002-G-080304 | Page | 13 / 28 |
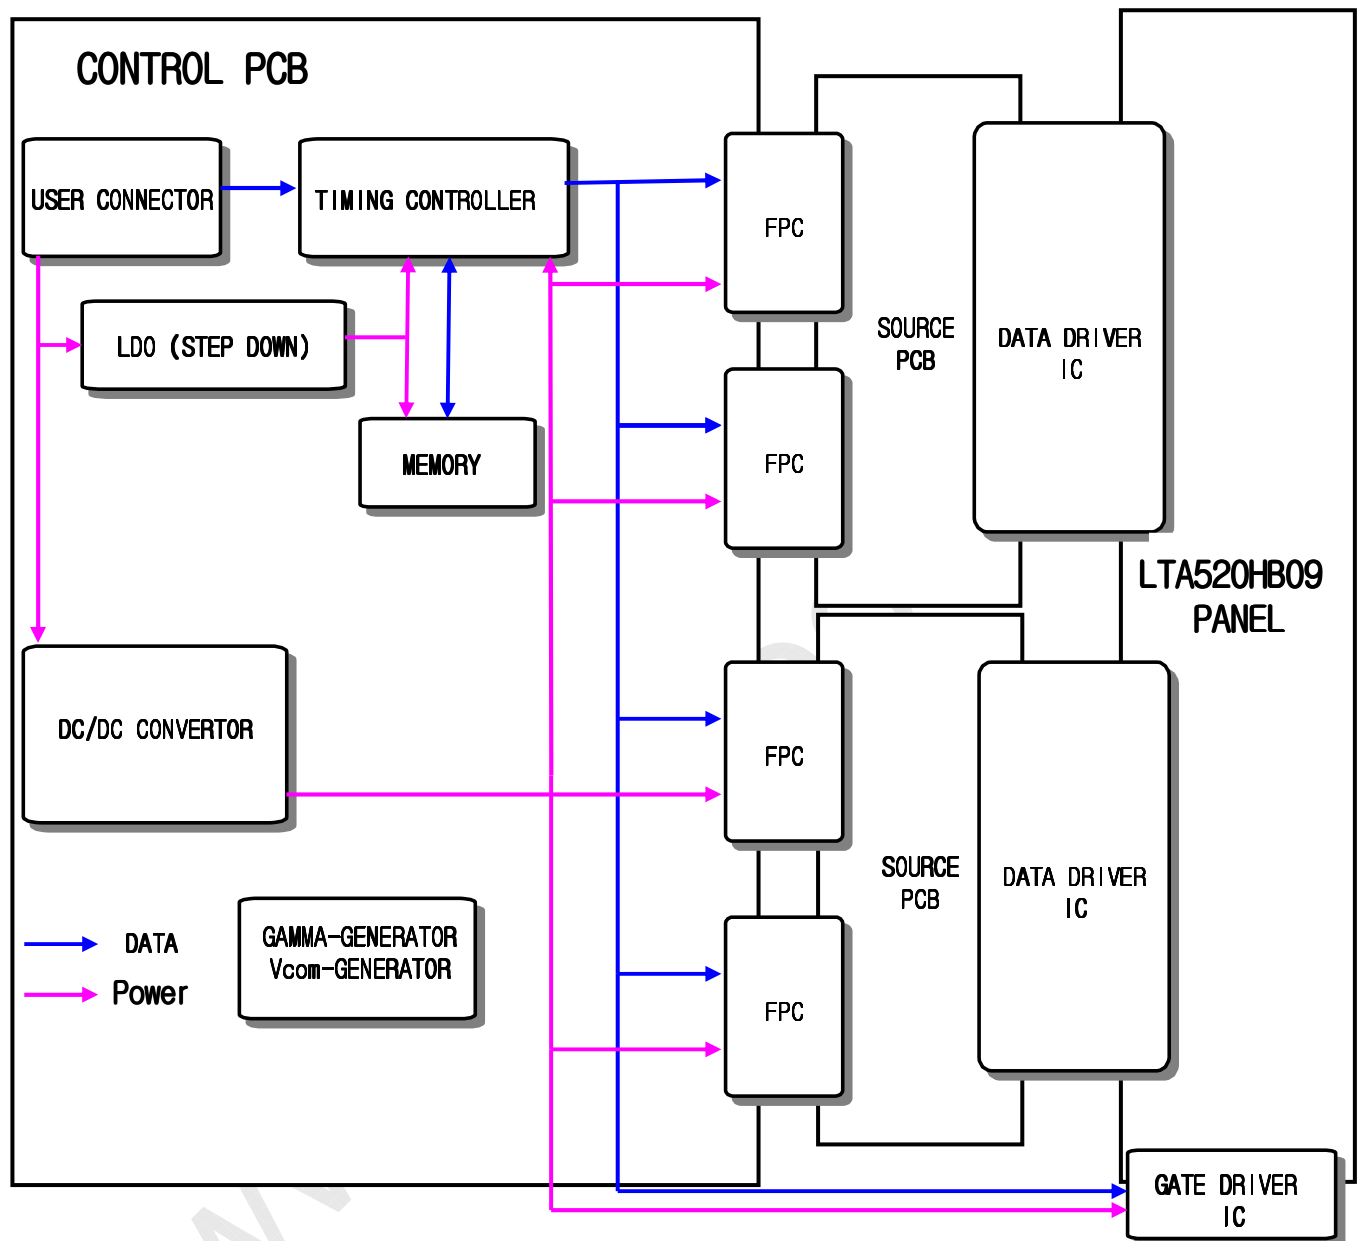
5. Input Terminal Pin Assignment

5.1. Input Signal & Power　　　　　　　　　　　　Connector : FI-RE51S-HF (JAE)

Pin	Symbol	Description	Pin	Symbol	Description
1	Power	DC 12V	26	RE[0]P	Even LVDS Signal +
2	Power	DC 12V	27	RE[1]N	Even LVDS Signal -
3	Power	DC 12V	28	RE[1]P	Even LVDS Signal +
4	Power	DC 12V	29	RE[2]N	Even LVDS Signal -
5	Power	DC 12V	30	RE[2]P	Even LVDS Signal +
6	GND	GND	31	GND	GND
7	GND	GND	32	ROCLK-	Even LVDS Signal -
8	GND	GND	33	ROCLK+	Even LVDS Signal +
9	GND	GND	34	GND	GND
10	RO[0]N	Odd LVDS Signal -	35	RE[3]N	Even LVDS Signal -
11	RO[0]P	Odd LVDS Signal +	36	RE[3]P	Even LVDS Signal +
12	RO[1]N	Odd LVDS Signal -	37	RE[4]N	Even LVDS Signal -
13	RO[1]P	Odd LVDS Signal +	38	RE[4]P	Even LVDS Signal +
14	RO[2]N	Odd LVDS Signal -	39		GND
15	RO[2]P	Odd LVDS Signal +	40	NC	
16	GND	GND	41	NC	
17	ROCLK-	Odd LVDS Signal -	42	NC	
18	ROCLK+	Odd LVDS Signal +	43	NC	
19	GND	GND	44	NC	
20	RO[3]N	Odd LVDS Signal -	45	NC	NOTE 1
21	RO[3]P	Odd LVDS Signal +	46	NC	
22	RO[4]N	Odd LVDS Signal -	47	NC	
23	RO[4]P	Odd LVDS Signal +	48	NC	
24	GND	GND	49	NC	
25	RE[0]N	Even LVDS Signal -	50	NC	
			51	NC	NOTE 1

Note1) No Connection: This PINS are only used for SAMSUNG internal using.

MODEL	LTA520HB04	Doc. No	06-002-G-080304	Page	14 / 28

Note(1) Pin number starts from Right side

PCB

Pin No. 1   Pin No. 51

#1   #51

#1   #51
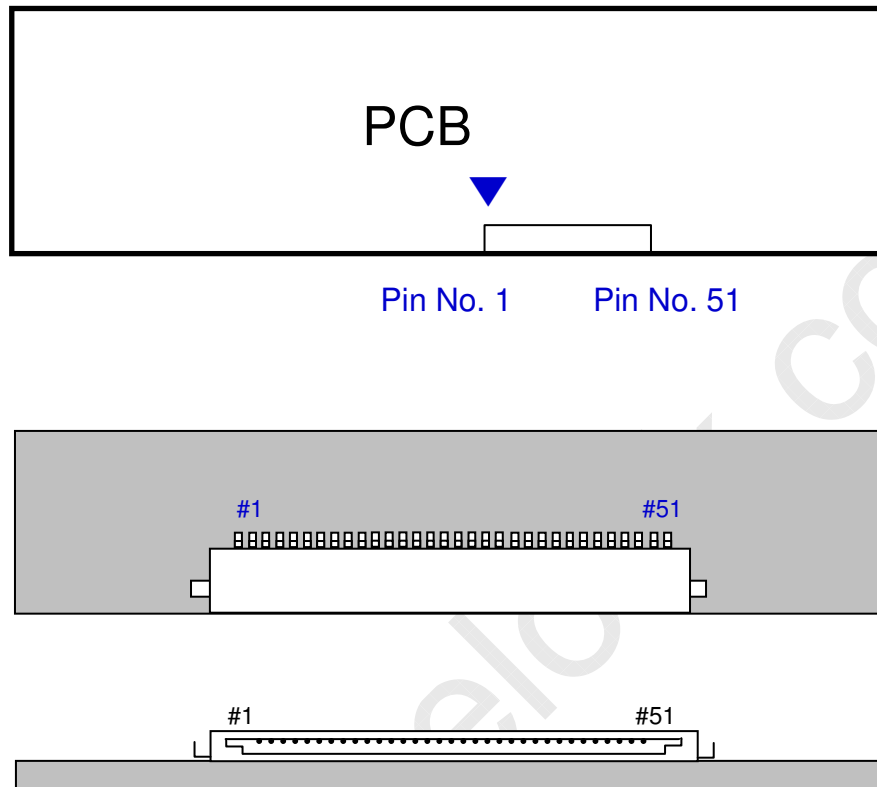
Fig. Connector diagram

a. Power GND pins should be connected to the LCD's metal chassis.
b. All power input pins should be connected together.
c. All NC pin should be separated from other signal or power.

MODEL	LTA520HB04	Doc. No	06-002-G-080304	Page	15 / 28

5.2. Inverter Input Pin Configuration

(1)Connector (Master& Slave): S14B-PHA-SM-TB(LF) (JST)

Pin No.	Pin Configuration (FUNCTION)
1	Vin (24 V)
2	Vin (24 V)
3	Vin (24 V)
4	Vin (24 V)
5	Vin (24 V)
6	GND
7	GND
8	GND
9	GND
10	GND
11	No Connection
12	Backlight On /Off [ON:2.4 - 5.25 V, OFF: 0 - 0.8 V]
13	Dimming Control [0V: Min, 3.3V: Max]
14	No Connection

5.3. Inverter Input Power Sequence

Vin (24V)
0.9 Vin
20msec [Min]
0.1 Vin
0.9 Vin

Dimming Control
(0 ~ 3.3 V)

0.5sec [Min]
0.5sec [Min]

Backlight On/Off
2.4V(On level)
0.8V(Off level)

0.5sec [Min]
0.1sec [Min]
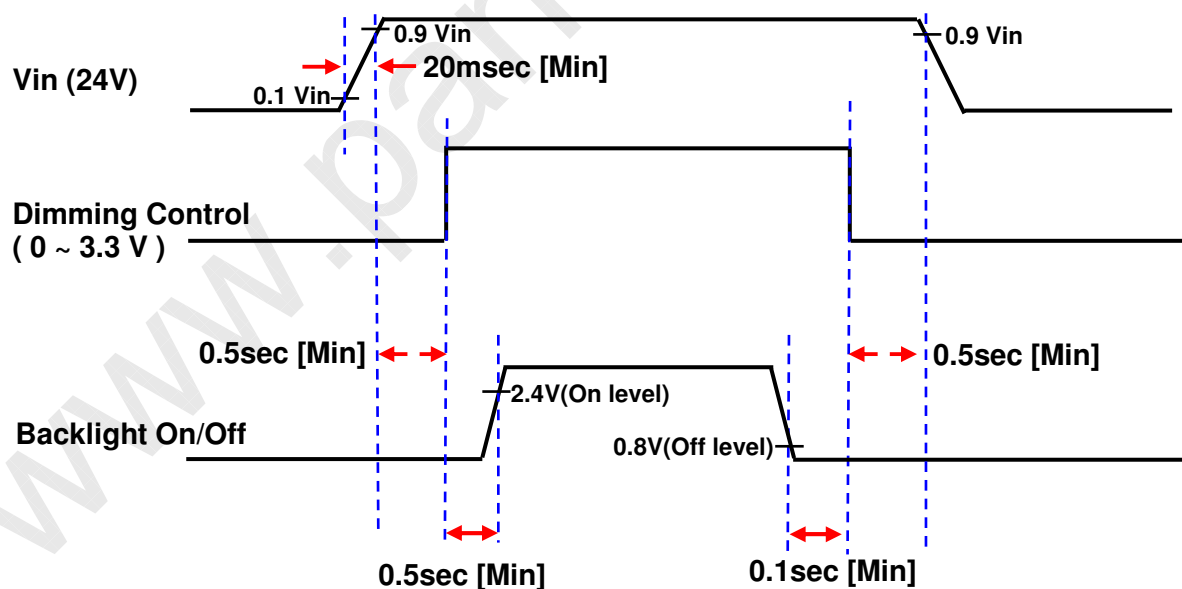
5.4 LVDS Interface
- LVDS Receiver : Tcon (merged)
- Data Format (JEIDA only)

	LVDS pin	JEIDA
TxOUT/RxIN0	TxIN/RxOUT0	R4
	TxIN/RxOUT1	R5
	TxIN/RxOUT2	R6
	TxIN/RxOUT3	R7
	TxIN/RxOUT4	R8
	TxIN/RxOUT6	R9
	TxIN/RxOUT7	G4
TxOUT/RxIN1	TxIN/RxOUT8	G5
	TxIN/RxOUT9	G6
	TxIN/RxOUT12	G7
	TxIN/RxOUT13	G8
	TxIN/RxOUT14	G9
	TxIN/RxOUT15	B4
	TxIN/RxOUT18	B5
TxOUT/RxIN2	TxIN/RxOUT19	B6
	TxIN/RxOUT20	B7
	TxIN/RxOUT21	B8
	TxIN/RxOUT22	B9
	TxIN/RxOUT24	HSYNC
	TxIN/RxOUT25	VSYNC
	TxIN/RxOUT26	DEN
TxOUT/RxIN3	TxIN/RxOUT27	R2
	TxIN/RxOUT5	R3
	TxIN/RxOUT10	G2
	TxIN/RxOUT11	G3
	TxIN/RxOUT16	B2
	TxIN/RxOUT17	B3
	TxIN/RxOUT23	RESERVED
TxOUT/RxIN4	TxIN/RxOUT28	R0
	TxIN/RxOUT29	R1
	TxIN/RxOUT30	G0
	TxIN/RxOUT31	G1
	TxIN/RxOUT32	B0
	TxIN/RxOUT33	B1
	TxIN/RxOUT34	RESERVED

MODEL	LTA520HB04	Doc. No	06-002-G-080304	Page	17 / 28

5.5 Input Signals, Basic Display Colors and Gray Scale of Each Color

COLOR	DISPLAY	DATA SIGNAL RED R0	R1	R2	R3	R4	R5	R6	R7	R8	R9	GREEN G0	G1	G2	G3	G4	G5	G6	G7	G8	G9	BLUE B0	B1	B2	B3	B4	B5	B6	B7	B8	B9	GRAY SCALE LEVEL
BASIC COLOR	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	:
	BLUE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	:
	GREEN	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	:
	CYAN	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	:
	RED	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	:
	MAGENTA	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	:
	YELLOW	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	:
	WHITE	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	:
GRAY SCALE OF RED	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R0
	DARK ↑	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1
		0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R2
		:	:	:	:	:	:	:	:	↑	↑	:	:	:	:	:	:	:	:	↑	↑	:	:	:	:	:	:	:	:	↑	↑	R3~
		:	:	:	:	:	:	:	:	↑	↑	:	:	:	:	:	:	:	:	↑	↑	:	:	:	:	:	:	:	:	↑	↑	R1020
	↓ LIGHT	1	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1021
		0	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1022
	RED	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1023
GRAY SCALE OF GREEN	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G0
	DARK ↑	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G1
		0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G2
		:	:	:	:	:	:	:	:	↑	↑	:	:	:	:	:	:	:	:	↑	↑	:	:	:	:	:	:	:	:	↑	↑	G3~
		:	:	:	:	:	:	:	:	↑	↑	:	:	:	:	:	:	:	:	↑	↑	:	:	:	:	:	:	:	:	↑	↑	G1020
	↓ LIGHT	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	G1021
		0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	G1022
	GREEN	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	G1023
GRAY SCALE OF BLUE	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	B0
	DARK ↑	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	B1
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	B2
		:	:	:	:	:	:	:	:	↑	↑	:	:	:	:	:	:	:	:	↑	↑	:	:	:	:	:	:	:	:	↑	↑	B3~
		:	:	:	:	:	:	:	:	↑	↑	:	:	:	:	:	:	:	:	↑	↑	:	:	:	:	:	:	:	:	↑	↑	B1020
	↓ LIGHT	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	1	1	B1021
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	B1022
	BLUE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	B1023

Note) Definition of Gray :
Rn : Red Gray, Gn : Green Gray, Bn : Blue Gray (n = Gray level)
Input Signal : 0 = Low level voltage, 1 = High level voltage

MODEL	LTA520HB04	Doc. No	06-002-G-080304	Page	18 / 28

6. Interface Timing

6.1 Timing Parameters （DE only mode）

SIGNAL	ITEM	SYMBOL	MIN.	TYP.	MAX.	Unit	NOTE
Clock	Frequency	$1/T_C$	130	148.5	155	MHz	-
Hsync	Frequency	F_H	50	67.5	75	KHz	-
Vsync	Frequency	F_V	48	60	62	Hz	-
Vertical Display Term	Active Display Period	T_{VD}	-	1080	-	Lines	-
Vertical Display Term	Vertical Total	T_V	1100	1125	1480	Lines	-
Horizontal Display Term	Active Display Period	T_{HD}	-	1920	-	Clocks	-
Horizontal Display Term	Horizontal Total	T_H	2050	2200	2350	clocks	-

Note) This product is DE only mode. The input of Hsync & Vsync signal does
      not have an effect on normal operation.
   (1) Test Point : TTL control signal and CLK at LVDS Tx input terminal in system
   (2) Internal V_{DD} = 3.3V

MODEL	LTA520HB04	Doc. No	06-002-G-080304	Page	19 / 28

6.2 Timing diagrams of interface signal (DE only mode)
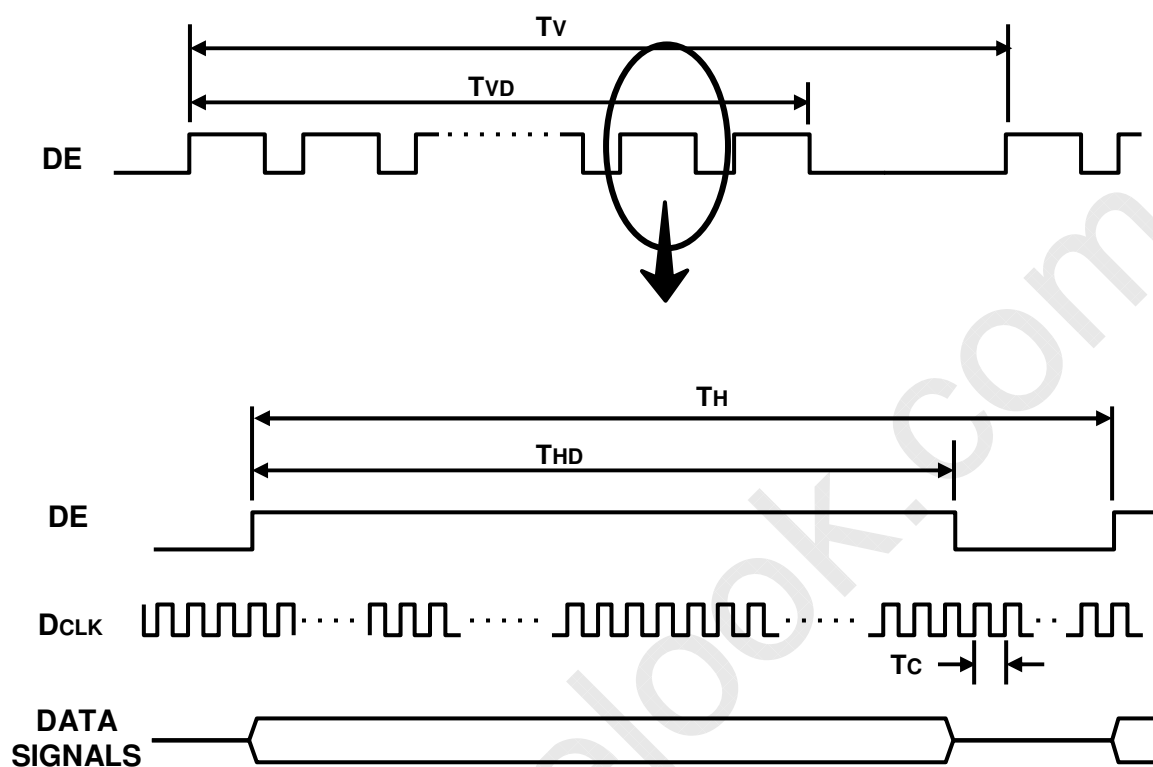
6.3 Power ON/OFF Sequence

To prevent a latch-up or DC operation of the LCD Module, the power on/off sequence should be as the diagram below.

$0 < T1 \leq 10ms$
$0 < T2 \leq 50ms$
$0 < T3 \leq 50ms$
$1000ms \leq T4$

$1000ms \leq T5$
(Recommend Value)
$100ms \leq T6$
(Recommend Value)
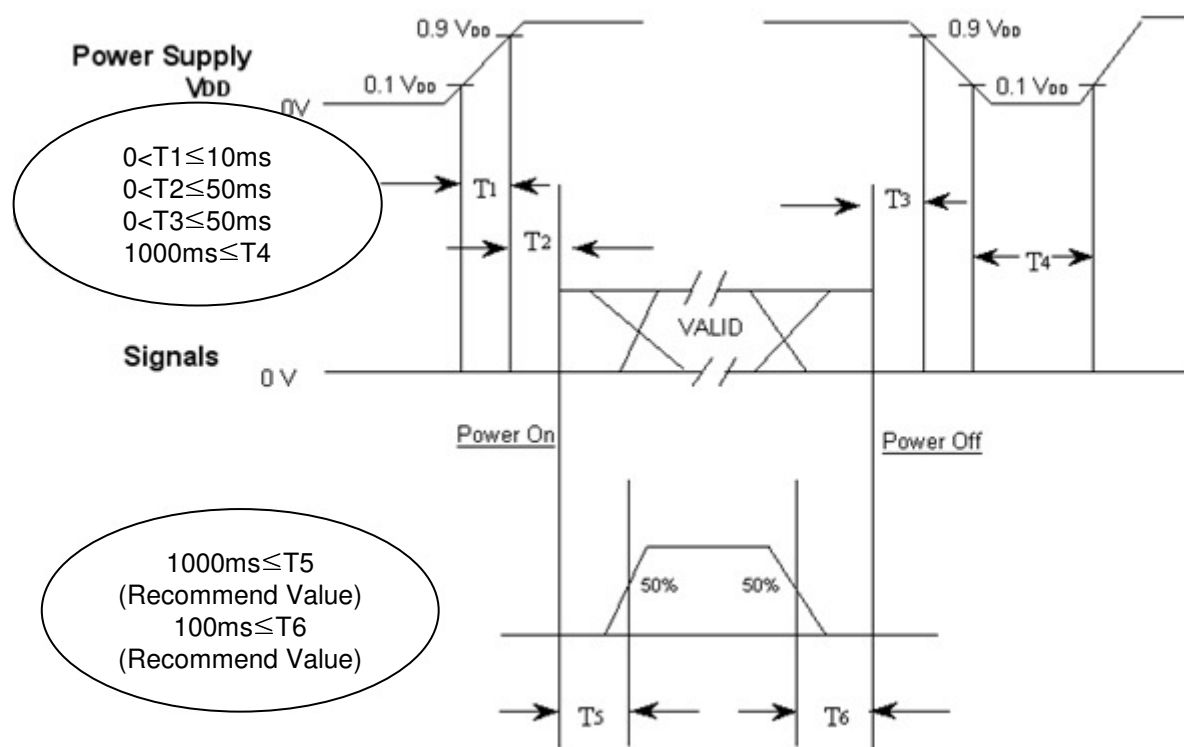
T1 : V_{DD} rising time from 10% to 90%
T2 : The time from V_{DD} to valid data at power ON.
T3 : The time from valid data off to V_{DD} off at power Off.
T4 : V_{DD} off time for Windows restart
T5 : The time from valid data to B/L enable at power ON.
T6 : The time from valid data off to B/L disable at power Off.

▪ The supply voltage of the external system for the Module input should be the same as the definition of V_{DD}.
▪ Apply the lamp voltage within the LCD operation range. When the back light turns on before the LCD operation or the LCD turns off before the back light turns off, the display may momentarily show abnormal screen.
▪ In case of V_{DD} = off level, please keep the level of input signals low or keep a high impedance.
▪ T4 should be measured after the Module has been fully discharged between power off and on period.
▪ Interface signal should not be kept at high impedance when the power is on.

MODEL	LTA520HB04	Doc. No	06-002-G-080304	Page	21 / 28

PRELIMINARY

Section A-A'
(S:N/1)

MAX 1.5(GAP)

ACTIVE AREA

* NOTES
1. BACKLIGHT : 24 COLD CATHODE FLUORESCENT LAMPS.
2. I/F CONNECTOR SPECIFICATION (51PIN)
   - MAKER : UJU
   - PART NO. : S050-C51B-C38
3. INVERTER CONNECTOR SPECIFICATION. (14PIN, 2EA)
   - MAKER : JST
   - PART NO.: S14B-PHN-SM-TB
4. USER HOLE: ALLOWED DEPTH OF USERHOLE SCREW INSERTION
   IS 9.7mm MAX.
5. GAP BETWEEN TOP CHASSIS AND GLASS(POL) IS 1.5mm MAX.
6. WEIGHT : Max 19Kg
7. SCREW TORQUE SPEC.(MAX TORQUE).
   M4 NO : 12.0Kgf.cm
8. BLACK MATRIX SPEC.
   - (A-B) ≤ 2.0 mm
   - (C-D) ≤ 2.0 mm

BLACK MATRIX

MODEL NAME: LTM520HB04
PART/SHEET NAME: OUTLINE DIMENSION
(FRONT VIEW)
SAMSUNG ELECTRONICS

REASON
DESCRIPTION OF REVISION
DRM'N BY: S.S.HAN   2007.11.24

SPECIFICATION

LTM520HB09

OUTLINE DIMENSION

GENERAL TOLERANCE

STEP	LEVEL 1	LEVEL 2	LEVEL 3
0 < X ≤ 4	±0.05	±0.1	±0.2
4 < X ≤ 16	±0.08	±0.15	±0.3
16 < X ≤ 64	±0.12	±0.25	±0.5
64 < X ≤ 256	±0.25	±0.4	±0.8

719.2±1 (OUTSIZE)
1226±1 (OUTSIZE)
1152 (ACTIVE AREA)
1166 ⁺⁰·⁵ (BEZEL OPENING)
648(ACTIVE AREA)
662⁺¹₋₀.₅ (BEZEL OPEN)

3-M4,DP=9 MAX (USERHOLE)
4-M4,DP=9 MAX (USERHOLE)
2-φ10 HOLE
30-φ3 HOLE (DP=1.0 MAX)

PRELIMINARY

POWER CONN.
JST:S14B-PHA-SM-TB

I/F CONN.
UJU:1S050-C51B-C38

ACTIVE CENTER

LAMP SUPPORT AREA
(HEIGHT= 4.2 MAX)

5-ALIGN HOLE

20-φ3 ALIGN HOLE

EMBOSS FOR MOUNTING
HEIGHT=7, 6 PLACES

12-M5, DP=7 MAX
(USERHOLE)

8-M4, DP=7 MAX
(USERHOLE)

EMBOSS FOR MOUNTING
HEIGHT=8, 5 PLACES

5-M4, DP=8 MAX

EMBOSS FOR MOUNTING
HEIGHT=7, 4 PLACES

4-M4, DP=7 MAX

4-φ3(ALIGN HOLE)

LAMP SUPPORT AREA
(HEIGHT= 4.2 MAX)

GENERAL TOLERANCE			
STEP	LEVEL 1	LEVEL 2	LEVEL 3
0 < X ≤ 4	±0.05	±0.1	±0.2
4 < X ≤ 16	±0.08	±0.15	±0.3
16 < X ≤ 64	±0.12	±0.25	±0.5
64 < X ≤ 256	±0.25	±0.4	±0.8

UNIT mm
SCALE N/S
TOLERANCE LEVEL 3

DESCRIPTION OF REVISION
REV DATE DRM'N BY DES'D BY CHK'D BY APP'D BY
S.S.HAN
2007.11.24

SAMSUNG ELECTRONICS

REASON
MODEL NAME   LTM520HB04
PART/SHEET NAME   OUTLINE DIMENSION
                   (REAR VIEW)
SPEC. NO.   CODE NO.   000
CHG'D BY   SHEET 2/2   VER. 000

REVISION

8. PACKING

8.1 CARTON (Internal Package)
  (1) Packing Form
     Corrugated fiberboard box and corrugated cardboard as shock absorber
  (2) Packing Method

**Packing
-Pallet Box**

Cushion-Foam

LCD Module

Cushion-Foam

Pallet-Plastic

→ **Direction be able to open it**
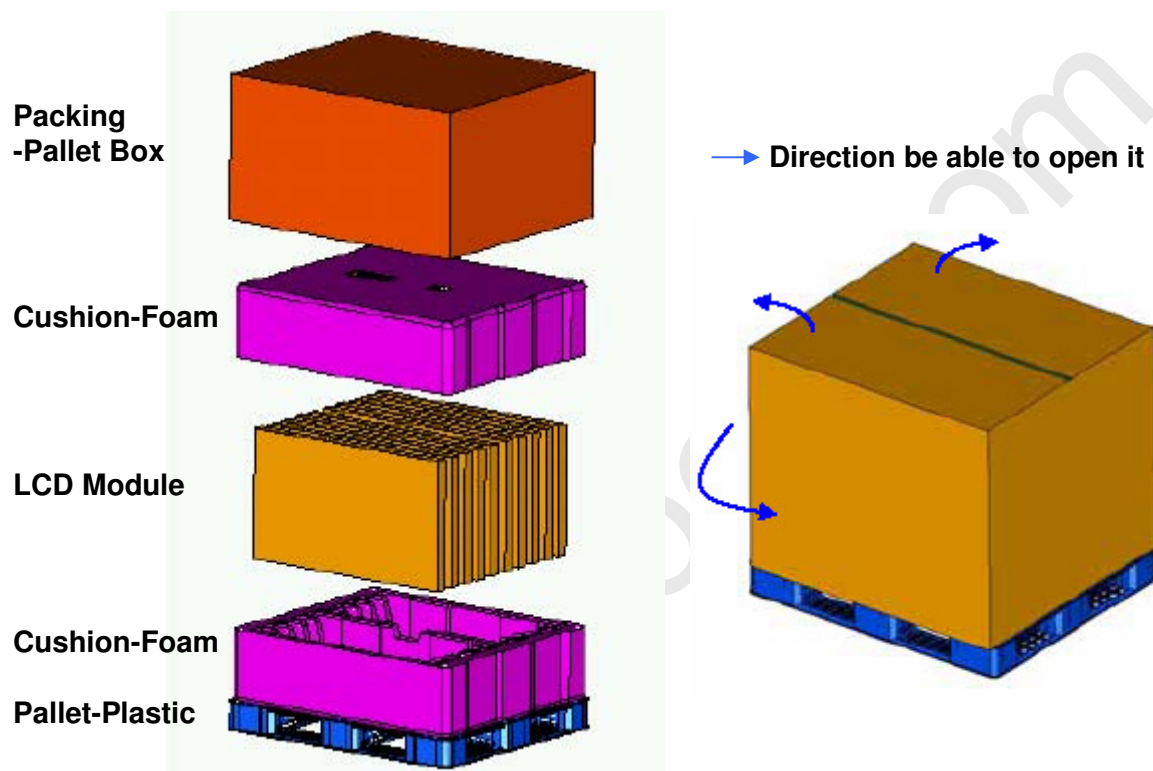
8.2 Packing Specification

Item	Specification	Remark
LCD Packing	9ea / (Packing-Pallet Box)	1. 171 Kg / LCD (9ea) 2. 15.6 Kg / Cushion-pallet (2ea) 3. 10.5 Kg / Packing-Pallet Box (1ea) 4. Cushion-pallet Material : EPS 5. Packing-Pallet Box Material : DW4
Pallet	1Box / Pallet	1. Pallet weight = 10kg
Packing Direction	Vertical	
Total Pallet Size	H x V x height	1475mm(H) x 1150mm(V) x995mm(height)
Total Pallet Weight	207.1kg	Pallet(10kg) + Module(21*9=171kg) + Cushion(up+botton=15.6kg) + Pallet-BOX(10.5kg)

MODEL	LTA520HB04	Doc. No	06-002-G-080304	Page	24 / 28

9. MARKING & OTHERS

A nameplate bearing followed by is affixed to a shipped product at the specified location on each product.

(1) Part number : LTA520HB04
(2) Revision: Three letters
(3) Lot number : X X X X XXX XX X

- Cell Position No. (In the Glass)
- Glass No. (In the one Lot)
- Lot No. (Glass)
- Month
- Year (Note1)
- Product code
- Line

(4) Nameplate Indication

LTA520HB04

0529

XXXXXXXXXX   XXX

MADE IN KOREA

Week code : 05 29
- week
- year

40mm

Revision code

Lot number

80mm

(5) Packing box attach

DVC : LTA520HB04
TYPE: XXXX
QTY : 9

ZAT53K0003   G1

100mm

Part number

Box serial number

165mm
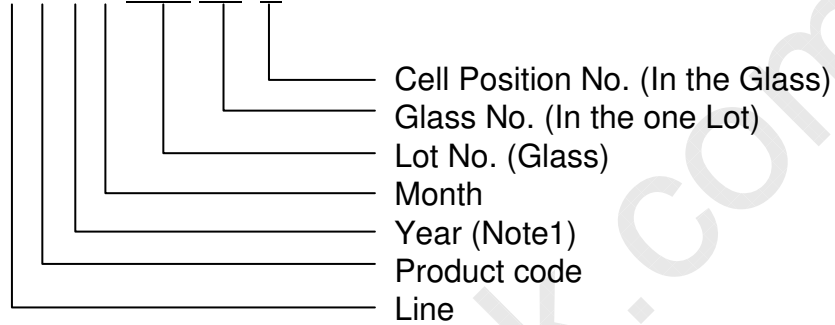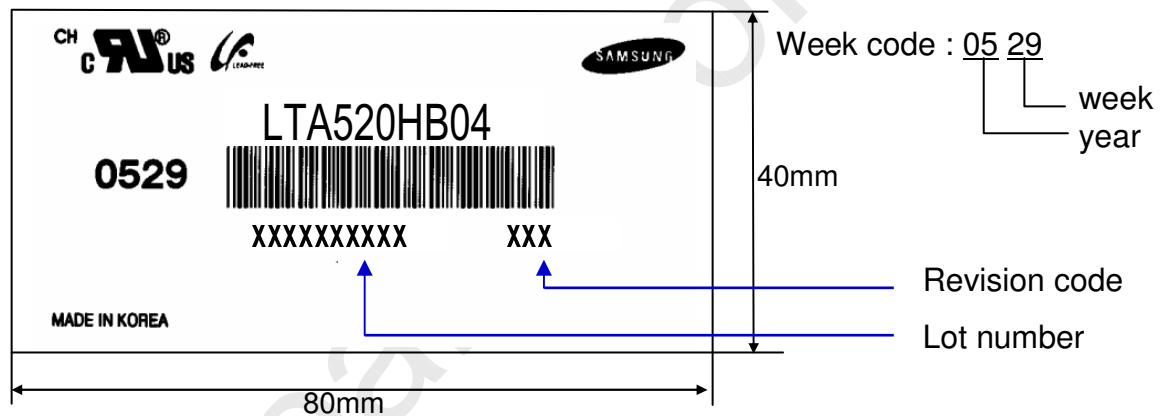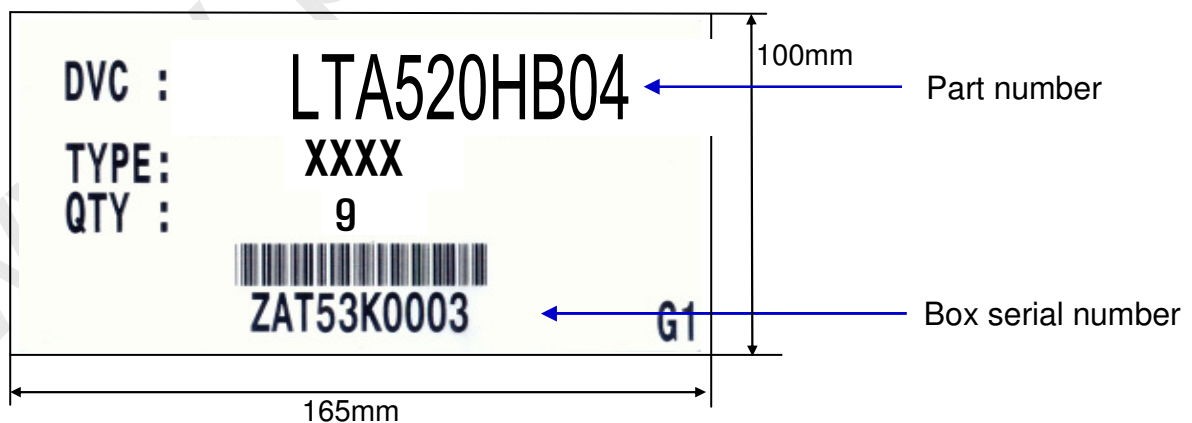
(6) Others
1. After service part
    Lamps cannot be replaced because of the narrow bezel structure.

MODEL	LTA520HB04	Doc. No	06-002-G-080304	Page	25 / 28

10. General Precautions

10.1 Handling

(a) When the Module is assembled, it should be attached to the system firmly using all mounting holes. Be careful not to twist and bend the Module.

(b) Because the inverter use high voltage, it should be disconnected from power before it is assembled or disassembled.

(c) Refrain from strong mechanical shock and / or any force to the Module. In addition to damage, this may cause improper operation or damage to the Module and CCFL back light.

(d) Note that polarizers are very fragile and could be damage easily. Do not press or scratch the surface harder than a HB pencil lead.

(e) Wipe off water droplets or oil immediately. If you leave the droplets for a long time, staining or discoloration may occur.

(f) If the surface of the polarizer is dirty, clean it using absorbent cotton or soft cloth.

(g) Desirable cleaners are water, IPA(Isopropyl Alcohol) or Hexane. Do not use Ketone type materials(ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.

(h) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth . In case of contact with hands, legs or clothes, it must be washed away with soap thoroughly.

(i) Protect the module from Electrostatic discharge. Otherwise the ASIC IC or Semiconductor would be damaged.

(j) Use finger-stalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.

(k) Do not disassemble the Module.

(l) Do not disassemble shield case of inverter & LVDS board.

(m) Do not connect N.C pins. (Samsung internal use only)

(n) Protection film for polarizer on the Module should be slowly peeled off just before use so that the electrostatic charge can be minimized. Must put on antistatic glove while handle a module

(o) Pins of I/F connector should not be touched directly with bare hands.

MODEL	LTA520HB04	Doc. No	06-002-G-080304	Page	26 / 28

10.2 Storage

(a) Do not leave the Module in high temperature, and high humidity for a long time.
It is highly recommended to store the Module with temperature from 0 to 35℃
and relative humidity of less than 70%.

(b) Do not store the TFT-LCD Module in direct sunlight.

(c) The Module should be stored in a dark place. It is prohibited to apply sunlight or
fluorescent light in storing.

10.3 Operation

(a) Do not connect or disconnect the Module in the "Power On" condition.

(b) Power supply should always be turned on/off by the "Power on/off sequence"

(c) Module has high frequency circuits. Sufficient suppression to the electromagnetic
interference should be done by system manufacturers. Grounding and shielding methods
may be important to minimize the interference.

(d) The cable between the back light connector and its inverter power supply should
be connected directly with a minimized length. A longer cable between
the back light and the inverter may cause lower luminance of lamp(CCFT) and
may require higher startup voltage(Vs).

10.4 Operation Condition Guide

(a) The LCD product should be operated under normal conditions.
Normal condition is defined as below;
- Temperature : 20 ± 15℃
- Humidity : 55 ± 20%
- Display pattern : continually changing pattern (Not stationary)

(b) If the product will be used in extreme conditions such as high temperature,
humidity, display patterns or operation time etc.., It is strongly recommended
to contact SEC for Application engineering advice. Otherwise, its reliability and
function may not be guaranteed. Extreme conditions are commonly found at
Airports, Transit Stations, Banks, Stock market, and Controlling systems.

MODEL	LTA520HB04	Doc. No	06-002-G-080304	Page	27 / 28

10.5 Others

(a) Ultra-violet ray filter is necessary for outdoor operation.

(b) Avoid condensation of water. It may result in improper operation or disconnection
    of electrode.

(c) Do not exceed the absolute maximum rating value. (supply voltage variation,
    input voltage variation, variation in part contents and environmental temperature,
    and so on)
    Otherwise the Module may be damaged.

(d) If the Module keeps displaying the same pattern for a long period of time,
    the image may be "sticked" to the screen.
    To avoid image sticking, it is recommended to use a screen saver.

(e) This Module has its circuitry PCB's on the rear side and should be handled
    carefully in order not to be stressed.

(f) Please contact SEC in advance when you display the same pattern for a long time.

MODEL	LTA520HB04	Doc. No	06-002-G-080304	Page	28 / 28